



DECORCERA

A LEADING TILES MANUFACTURER IN INDIA

**QUALITY CERAMIC AND
PORCELAIN OUTDOOR INDOOR
WALL AND FLOOR TILES**

SOLUBLE SALT TILE RANGE




600x600mm

600x600mm


Nano Vitrified Tiles are sheltered with nano pores and a liquid layer of silica to make them smooth and shiny. We use high-quality decorative paper to produce elegant designs that let your area sparkle. Their compact size adds to their flexibility and appeal. These tiles are scratch-proof and crack-resistant that makes your space glow for long. Nano Vitrified Tiles comes with shiny textures, a variety of designs, colors and supreme finish. Moreover, we follow international standards for keeping our products class apart.




600x600mm




1001




1017




1020



1022




1045



1048


600x600mm




1050




1053




1054



1061




1062




1064




600x600mm



1065




1068




1069



1072




1075




1081


600x600mm



1082




1083




1084




600x600mm




Armenis




Botticino



Crema Capri




Crema Marfil




Embassy




Perle



Luna



Orion Wooden



Trinity

600x600mm




TECHNICAL SPECIFICATION

			Value	Method of Testing
1.	Deviation in Length	± 0.6%	± 0.1%	EN 98
2.	Deviation in Thickness	± 5%	± 4%	EN 98
3.	Straightness of Sides	± 0.5%	± 0.1%	EN 98
4.	Rectangularity	± 0.6%	± 0.2%	EN 98
5.	Surface Flatness	± 0.5%	± 0.3%	EN 98
6.	Water Absorption *	< 0.5%	± 0.05%	EN 99
7.	Mohs Hardness *	> 6	> 7	EN 101
8.	Flexural Straightness *	> 27 N/mm ²	> 47 N/mm ²	EN 100
9.	Abrasion Resistance	> 204 mm ³	< 98 mm ³	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength *	> 1113 N	> 2830 N	ASTM C-648
12.	Density (g/cc)	> 2	> 2.4	DIN 51082
13.	Frost Resistance	Frost proof	Frost proof	EN 202
14.	Chemical Resistance	No damage	No damage	EN 106
15.	Thermal Shock Resistance	No damage	No damage	EN 104
16.	Colour Resistance	No damage	No damage	DIN 51094
17.	Thermal Resistance	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	EN 103
18.	Stain Resistance	Resistant	Resistant	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	—	Min. 65% - 70% reflection	Glossmeter

Packing Detail

Size	No. of Tiles/Box	Coverage Area
600x600mm	4 pcs.	1.44 sq.mt. / 15.5 sq.ft.




IVORY PLAIN

600x600mm 60x60cm 24" x 24"



1004

600x600mm 60x60cm 24" x 24"

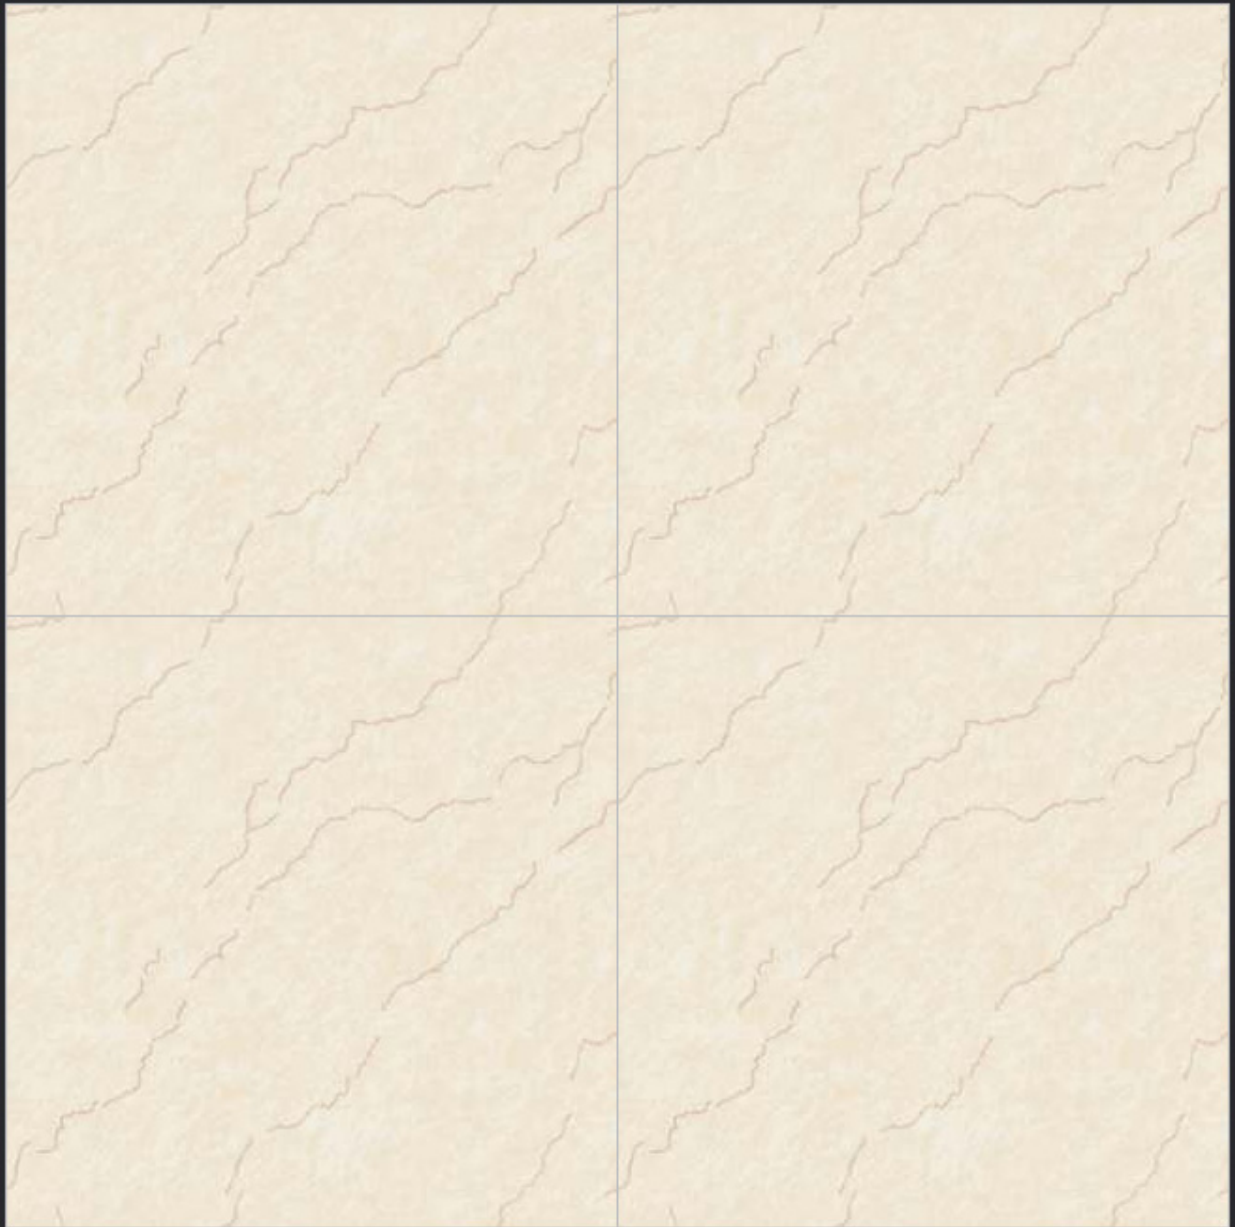

1004

600x600mm 60x60cm 24" x 24"



1006

600x600mm 60x60cm 24" x 24"




1006

600x600mm 60x60cm 24" x 24"



1008

600x600mm 60x60cm 24" x 24"

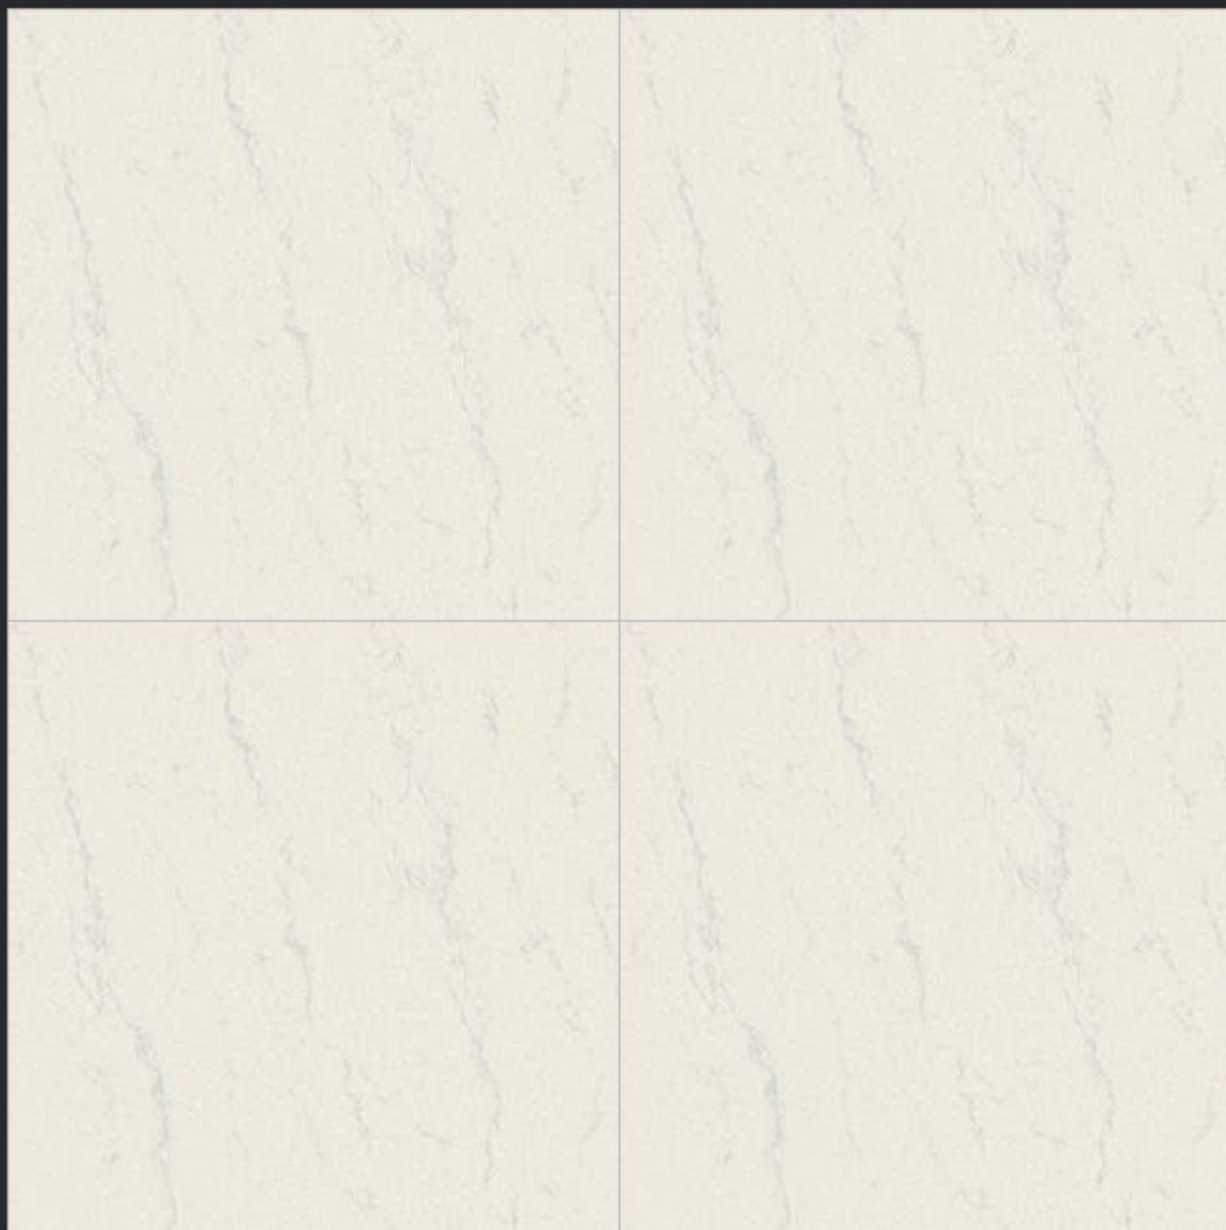


1008

600x600mm 60x60cm 24" x 24"



1011

600x600mm 60x60cm 24" x 24"

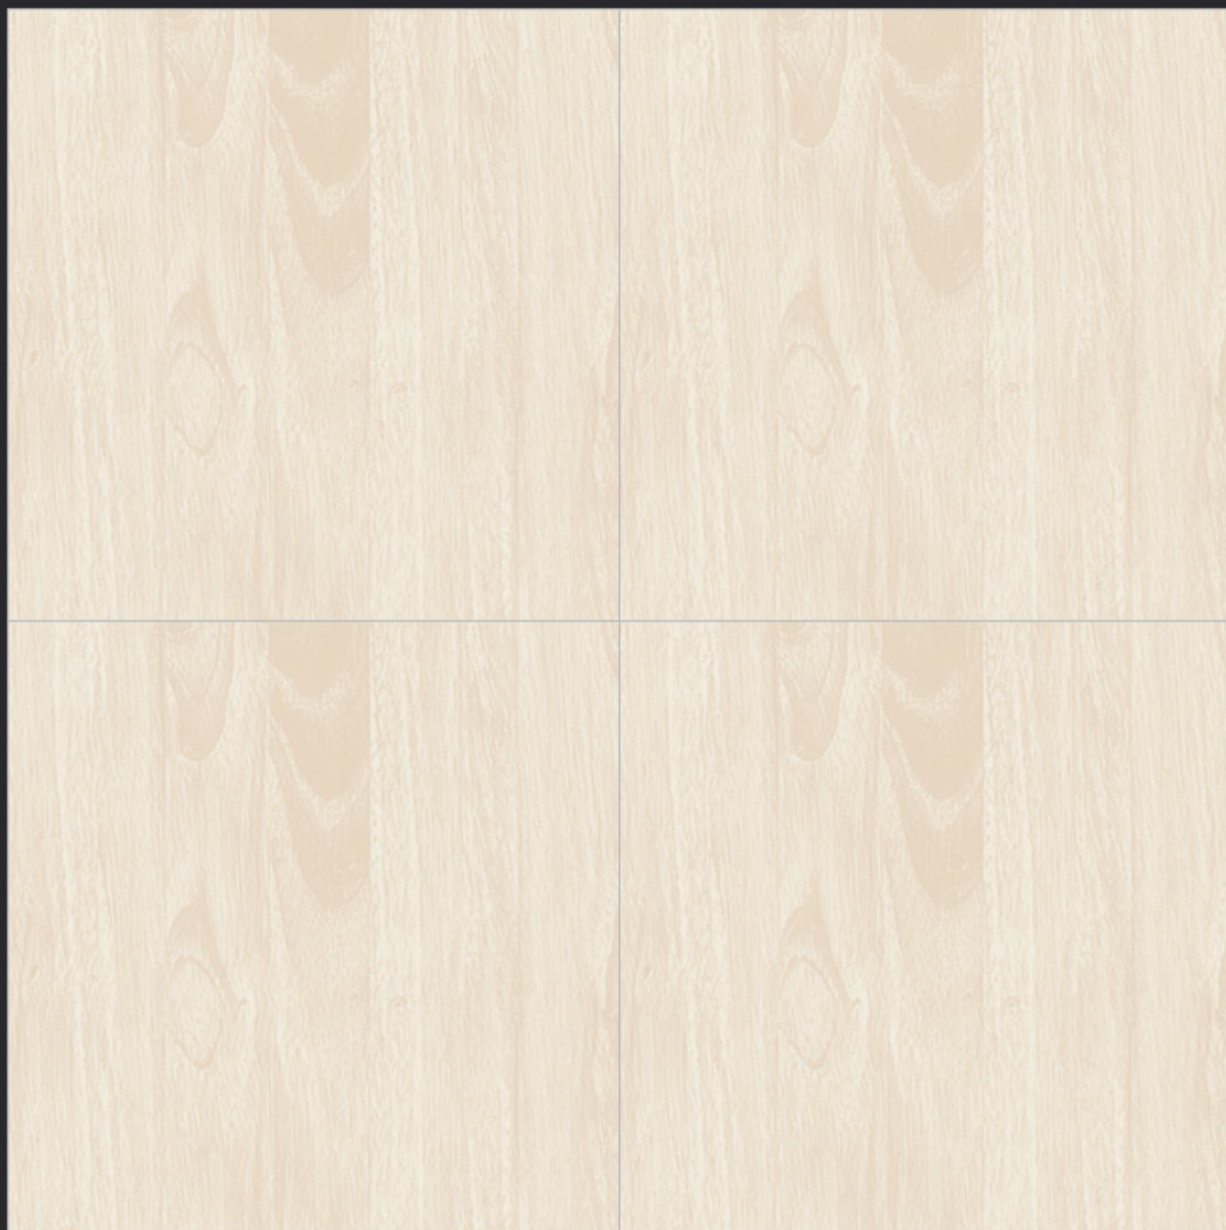

1011

600x600mm 60x60cm 24" x 24"



1017

600x600mm 60x60cm 24" x 24"




1017

600x600mm 60x60cm 24" x 24"



1018

600x600mm 60x60cm 24" x 24"

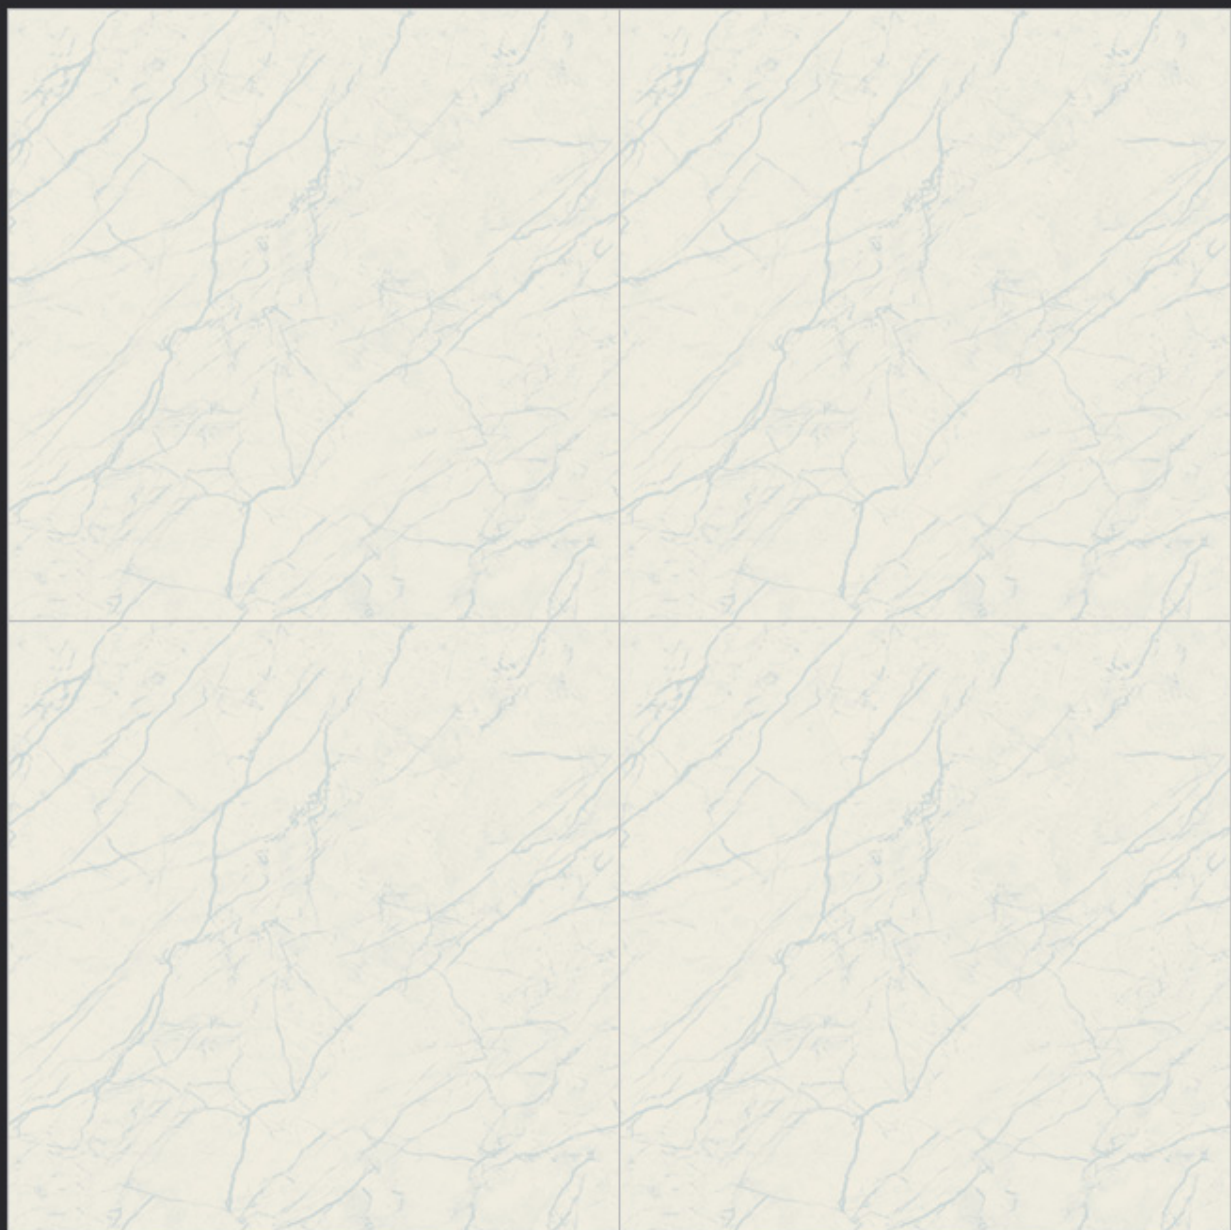

1018

600x600mm 60x60cm 24" x 24"




1038

600x600mm 60x60cm 24" x 24"



1038

600x600mm 60x60cm 24" x 24"

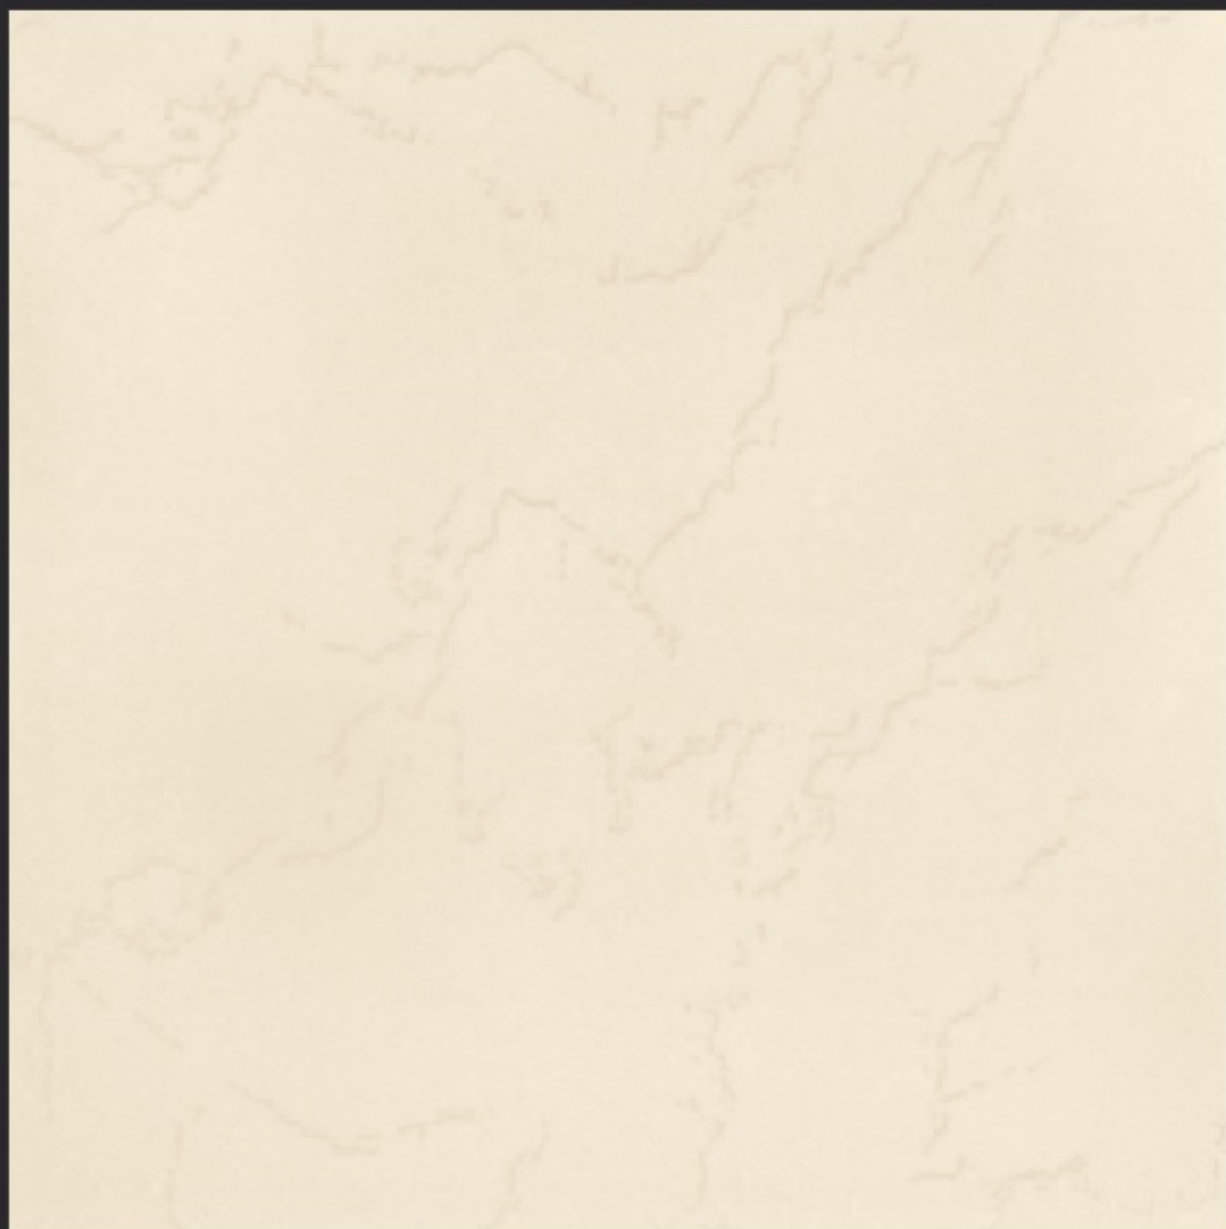

1039

600x600mm 60x60cm 24" x 24"




1039

600x600mm 60x60cm 24" x 24"



1040

600x600mm 60x60cm 24" x 24"

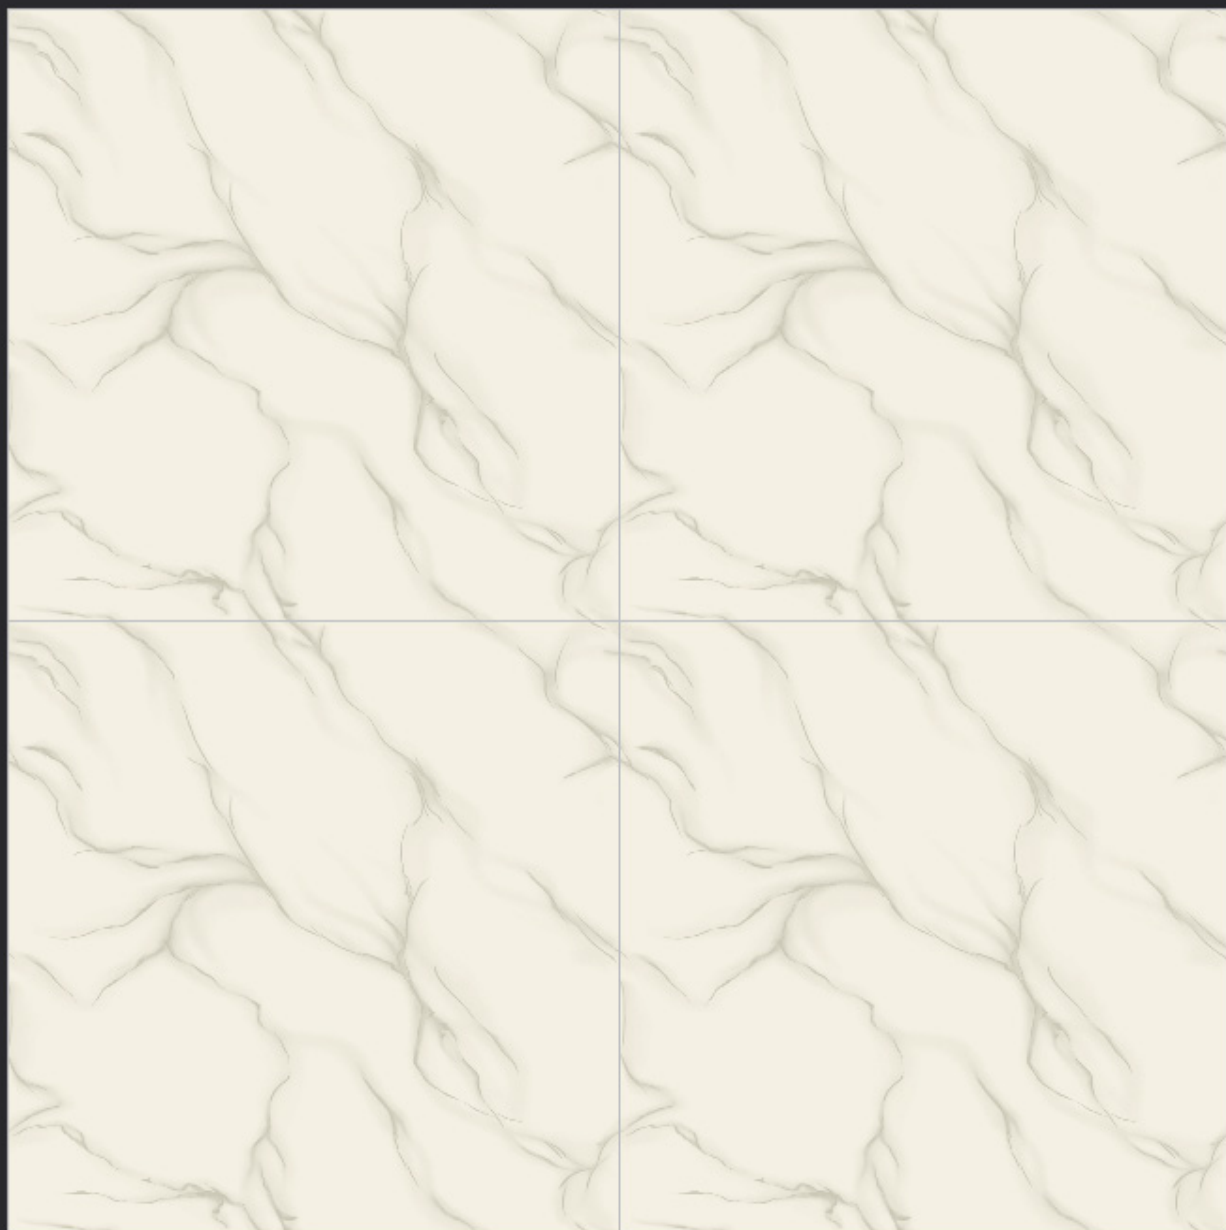

1040

600x600mm 60x60cm 24" x 24"



OSLO

600x600mm 60x60cm 24" x 24"



OSLO

600x600mm 60x60cm 24" x 24"